

# Platinum SERIES 600

## 600 Wide 19" Server Cabinets

*Highly versatile fully configured 19" Server Rack with outstanding features and value for money this cutting edge designed rack will suit the most demanding Data Centre environment and discerning customer.*

Available in:

RU heights = 42RU and 47RU  
 Depths = 1000mm and 1200mm  
 Width = 600mm

- Curved fully perforated front door and twin fully perforated rear doors with an industry leading 81% open area for optimal air flow
- Split level side panels provide convenient access to installed equipment
- Depth adjustable 19" vertical mounting rails in 6.35 mm increments
- "RU" numbers printed on 19" rails
- Quick release, field reversible doors
- Two 135mm PDU/Cable trays included
- 1,200 Kg Static Load Rated
- Can be supplied as flat pack on request
- Full range of accessories available



SPLIT REAR DOORS



TOP PANEL




RoHS




SCI QUAL  
INTERNATIONAL

JAS-ANZ



QUALITY APPROVED TO AS/NZS ISO 9001:2008  
 REGD. Number 294

## Product Information:

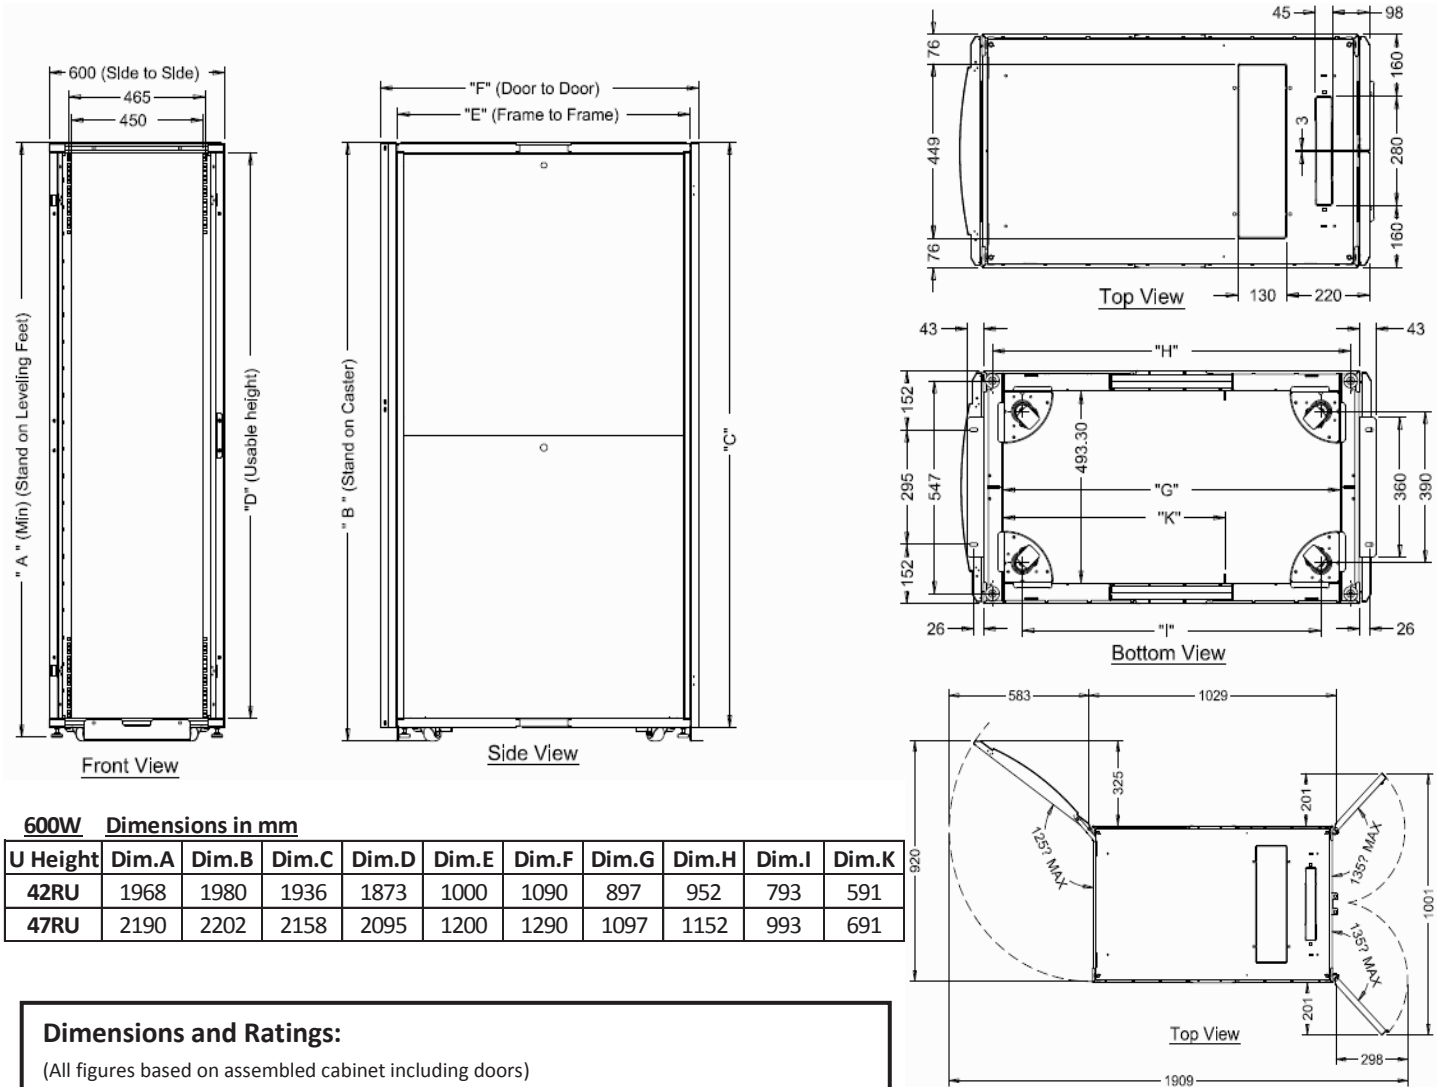

### 600W Dimensions in mm

U Height	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E	Dim.F	Dim.G	Dim.H	Dim.I	Dim.K
42RU	1968	1980	1936	1873	1000	1090	897	952	793	591
47RU	2190	2202	2158	2095	1200	1290	1097	1152	993	691

### Dimensions and Ratings:

(All figures based on assembled cabinet including doors)

- Door Perforation Pattern Open Area 80% Plus
- Internal Height = 42 RU or 47 RU
- Static Load Rated = 1,200Kg
- Casters Dynamic Load = 295Kg p/wheel
- Door Opening Radius = 135 degrees
- Can be supplied as Flat pack
- Comes Standard With Levelling Feet Only
- Comes With Two Vertical PDU/Cable Managers

Platinum 600mm Wide 19" Server Racks	1000D X 600W		1200D X 600W	
	42RU	47RU	42RU	47RU
Overall Height of Rack Without Casters (mm)	1,968	2,190	1,968	2,190
Overall Height of Rack on Casters (mm)	1,980	2,202	1,980	2,202
Overall Depth (mm)	1,090	1,090	1,290	1,290
Maximum Mounting Depth (mm)	897	897	1,097	1,097

### Standards and Materials:

Dimensions conform to EIA-310D, IEC-6029 -2

Five stage iron phosphate pre-treatment with textured powder coat finish, tested to 500 hours salt spray under ASTM-D610-01 and ASTM-B117

Available in low gloss textured black

Designed and Manufactured under ISO9001:2008 and ISO 14001

All materials are RoHS compliant